

Palm Beach™ Polysatin Shutters

Order Form Key

Use the following key as a guide when completing the Palm Beach polysatin shutters order form.

Note: Items marked with an asterisk (*) require a surcharge.

1 Color

Specify color number and name.

W = White WS = White Silk OW = Off White

2 Hinge Color

Specify hinge color number and name.

Hinges with fixed pin:

WH = White WS = White Silk OW = Off White
 CH = Chrome BR = Brass SS = Stainless Steel*
 AB = Antique Bronze

Lift Off Hinges with removable pin:

BR-R = Brass WH-R = White WS-R = White Silk
 OW-R = Off White AB-R = Antique Bronze

3 Louver Size

Specify louver size: 2³/₈" , 3³/₈" or 4¹/₂"

4 IM or OM

Specify inside mount or outside mount.

IM = Inside Mount

Factory takes a standard framed deduction of 1/4" from width and height or a standard without frame deduction of 3/16" from width and height.

On all inside mounts, diagonal measurements must be taken. If diagonal measurements are not equal, consider making greater deductions than the standard 1/4" (framed) or 3/16" (without frame). If the diagonal measurement difference is greater than 1/2", we recommend an outside mount for that particular window opening.

OM = Outside Mount

Factory takes no deductions. Submitted size will be the finished shutter size.

When measuring the opening of a typical window for outside mounts, we recommend adding the width of the base of the frame plus 1/4", per framed side, to the largest width and height measurements. This provides a 1/4" reveal around the entire window opening.

5 Frame Type

The following types are inside mount frames:

CRF = Contemporary w/ Rubber Flex COL = Colonial

CDF = Contemporary w/ Deco Flex Z = Z-frame

CNF = Contemporary w/ No Flex

Add -X to frame options to specify Rear Rubber Flex

Example: For CDF with rear rubber flex order CDF-X

BP = Bypass track system* BF = Bi-fold track system*

BPFE = Bypass frame extension

BFBT = Bi-fold track system with addition of bottom track*
 (Factory takes 3/8" - 1/2" deduction for bottom track)

HS = Hang strip/ light stop (two provided per unit)

WF = Without frame (deductions taken)

The following types are outside mount frames:

Standard Additions

	3-Sided Frame		4-Sided Frame	
	W	H	W	H
CNF = Contemporary/ No Flex	2 3/8"	1 3/16"	2 3/8"	2 3/8"
T = Traditional	5 3/4"	2 7/8"	5 3/4"	5 3/4"
BF = Bi-fold track system*	4 1/2"	2 1/4"	4 1/2"	4 1/2"
BP = Bypass track system*	4 1/2"	2 1/4"	4 1/2"	4 1/2"
BPFE = Bypass frame extension	4 1/2"	1"	4 1/2"	2"
BFBT = Bi-fold track system with addition of bottom track (Bottom track cannot be added after shutter is manufactured)				
HS = Hang strip/ light stop (two provided per unit)				
WF = Without frame (no deductions taken)				

6 Rough Measure

Enter rough measurements and number of panels. This will be used as a guide for price estimates and configurations until a final measure is performed by a trained installer.

7 Ordered Size

Enter width and height dimensions to the nearest 1/16".


Note: Splices will occur on frames and valances over 156".

8 Number of Panels Per Opening

1 = one panel 2 = two panels 3 = three panels etc.

9 Panel Configuration

Print the letters of the panel configuration. Examples:

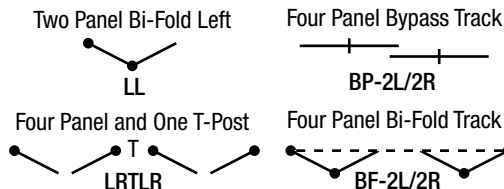

Then, in the appropriately numbered box, draw the panel configuration. Include the letters of the configuration.

Note: For windows requiring unequal panel widths, see reference guide for details.

10 Frame Detail

2 = 2-sided; 3 = 3-sided; 4 = 4-sided

3D = 3-sided door which provides 3/8" floor clearance

4SIL = 4-sided with sill (bottom flange removed)

2CAF = 2-sided Café style*

3CAF = 3-sided Café style*

3CSIL = 2-sided Café style with sill (no bottom flange)*

4CAF = 4-sided Café style, panels part way up*

DH = Double-hung*

DHHT = Double-hung with horizontal T-post*

SI = Special applications other than those listed above

Note: Indicate height for Cafe and Double-hung styles in column 14.

11 Build-Out

1 = Build-out provides 1/2" extension

2 = Build-out provides 1" extension (maximum)

3 = Build-out for track systems provides 1 5/8" (maximum)

12 Tilt Bar

FH = Front hinge side tilt bar (Palmetto) G= Gear System (Lantana)

FC = Front center tilt bar (Palmetto)

BH = Back hinge side tilt bar (Palmetto)

13 Valance Type (Track Systems Only)

S = Standard valance

14 Divider Rail/Café/Double-Hung Height

DR1 = First divider rail (required for panel heights over 60")

DR2 = Second divider rail (required for panel heights over 96")

Note: Enter "C" if the desired location is at the center of the panel.

OM: Enter measurement(s) from bottom of frame to center of divider rail

IM: Enter measurement(s) from inside bottom of window or sill to center of divider rail

15 T-Post

EQ = T-post placed to provide equally divided openings

For uneven placement, always start from the left, indicate distance in inches from left side of shutter to center of each T-post.

16 No-Magnet Lock

Y = Yes N = No

Note: Traditional magnets are supplied by selecting "no".

17 Astragal

R = Right panel over left L = Left panel over right

Note: Standard astragal configuration is right over left.

18 Rail Size

2 = 2" top and bottom rail

4 = 4" top and bottom rail

Note: Maximum panel size with 2" rail is 5 square feet.

Lineal Materials

Grid prices include standard frames, T-posts and hardware. To order additional lineal materials, indicate quantity, color and length.